



Airless Accessories

Graco's Complete Line of Professional Airless Accessories



PROVEN QUALITY. LEADING TECHNOLOGY.

Essential Tools for Maximum Productivity and Performance.

Quality. Performance.
Durability. Productivity.

Only Graco delivers essential tools for maximum productivity and performance, backed by a solid reputation for proven quality, reliability, warranty and unmatched on-the-job performance. Graco® accessories are designed to meet the professional painting contractor's standards for quality and performance. Graco is the name to turn to today and as your business grows.



What is the G4 Difference? Simply put, it's Graco's commitment to provide you with the very best airless accessories, backed by a solid reputation for proven quality, maximum performance, reliable warranty coverage and unmatched on-the-job productivity. Graco accessories are designed to exceed the professional contractor's standards for quality and performance. Graco is the name to turn to today and as your business grows.

PROVEN **QUALITY**

Graco parts and accessories are made from the highest quality materials to withstand extreme conditions. Every Graco airless gun and RAC® spray tip are tested prior to shipment.

MAXIMUM **PERFORMANCE**

Airless accessories maximize job performance by providing a wide variety of accessory options for every application. Each accessory offers unique features for top spraying performance.

INDUSTRY-LEADING **WARRANTY**

Graco is the industry leader in contractor spray equipment and stands behind its products. Airless accessories provide a 1-year warranty on hard parts.

UNMATCHED **PRODUCTIVITY**

Choose from a full line of accessories to make the job easier and get the work done faster. Essential tools for maximum productivity and performance.

For patent information see www.graco.com/patents.

Choose the right **ACCESSORY** for maximum productivity and performance.

Airless Spray Guns

Graco's airless spray guns are designed to be the longest lasting, most reliable airless spray guns in the market. They're the first choice of painting contractors, and they deliver the reliability and performance you've come to expect from Graco.

Hoses and Kits

Graco's airless hoses and hose/gun packages are the ideal choice for maximum performance. With superior flexibility and durability, our BlueMax II™ and XTreme-Duty™ Airless Hoses are designed to ensure you get the best results from your airless sprayer.

Spray Tips and Guards

Graco spray tips and guards are built to the highest standards and ensure the best finish in the industry. Each Graco tip is 100% tested for flow rate to meet the tough standards of painting contractors, and these careful processes deliver the quality and maximum life you've come to expect from Graco.

Pump-Fed Rollers and Accessories

Painting has never been easier thanks to Graco's Power Rollers, JetRoller and other extended reach accessories. No more climbing and stopping to dip the roller in a messy paint tray—simply pull the gun trigger when you need more paint and keep rolling.

Filters and Fluids


Graco offers a complete line of filters and fluids for every one of our innovative airless accessories. No matter your job, Graco keeps you working and ensures your equipment delivers industry-leading performance.

Contractor™ & FTx™ Spray Guns

Exclusive FlexSeal Design

Graco's innovative Contractor and FTx Guns are designed to be the longest lasting, most reliable airless spray guns on the market. They're the #1 choice of painting contractors, and they deliver the reliability and performance you've come to expect from Graco.

DESCRIPTION	PART #
CONTRACTOR GUN WITH 4-FINGER TRIGGER	288425
INCLUDES	
• RAC X™ 515 SwitchTip	
• RAC X Guard	
CONTRACTOR GUN WITH 2-FINGER TRIGGER	288420
INCLUDES	
• RAC X 515 SwitchTip	
• RAC X Guard	
CONTRACTOR GUN WITH 4-FINGER TRIGGER	288431
INCLUDES	
• RAC 5 515 SwitchTip	
• RAC 5 Guard	
FTx GUN WITH 2-FINGER TRIGGER	288430
INCLUDES	
• RAC X 517 SwitchTip	
• RAC X Guard	
FTx GUN 4-FINGER TRIGGER	288429
INCLUDES	
• RAC X 517 SwitchTip	
• RAC X Guard	
FTx GUN 2-FINGER TRIGGER	288421
INCLUDES	
• RAC 5 517 SwitchTip	
• RAC 5 Guard	

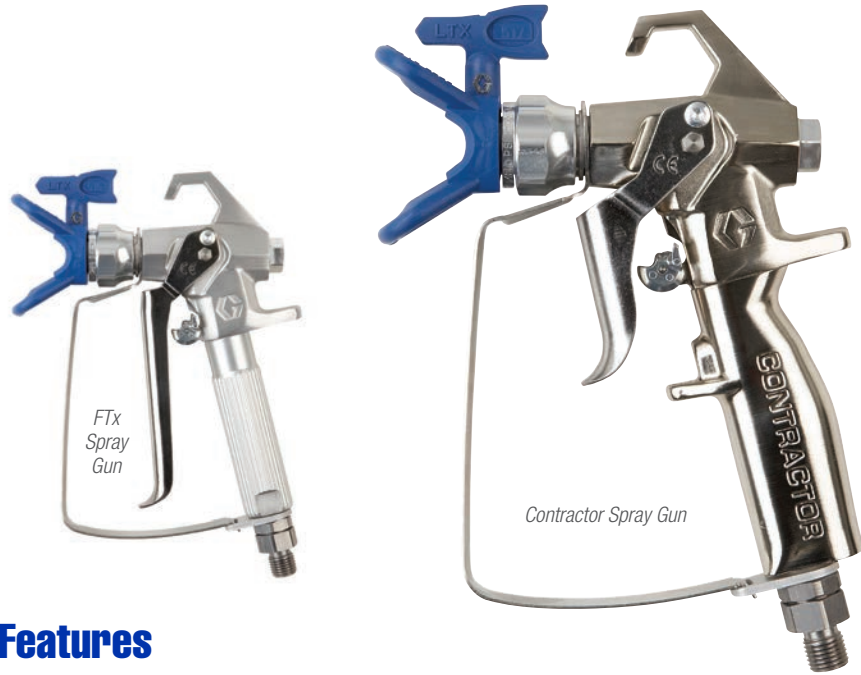

Features

Exclusive FlexSeal™ Needle

- ▶ Totally enclosed patented design eliminates needle's exposure to fluid, extends needle life by 70%, and ensures consistent needle shut-off
- ▶ Fluid pushes on seal to quickly shut off needle and reduce spitting
- ▶ Spring is located outside fluid path for better flow
- ▶ Helps eliminate pack out and slow needle shut-off

Reduced Gun Spitting

- ▶ Repositioned seat is closer to the tip, eliminating 60% of the dead space
- ▶ Less paint left between needle and tip results in less spitting

Ergonomic Design

- ▶ Form-fitted handle provides maximum control and comfort
- ▶ Detachable trigger guard swings clear of gun handle for easy filter access
- ▶ Lightweight design reduces operator fatigue

Trigger Lock and Gun Trigger

- ▶ Smooth, lightweight trigger pull with simple, thumb-engaged safety lock
- ▶ Contractor and FTx guns come with 2 or 4 finger triggers

Modular Needle Cartridge

- ▶ Easiest gun to service on the market
- ▶ Simply remove the trigger cross pin and unthread front housing to change out needle

EasyGlide Swivel

- ▶ Exclusive dual-seat swivel design reduces sealing friction under pressure, making this the best swivel on the market!

Easy Out™ Gun Filter

- ▶ Filters from the inside out to prevent filter from collapsing
- ▶ Interchangeable with Contractor II and FTx II guns




FTx 4-finger gun trigger – full length trigger is easier to hold in continuous spraying.



Modular needle cartridge – easiest gun to service on the market.


Graco vs Other Industry-Standard Needle Designs

Graco's FlexSeal Totally Enclosed Needle Design

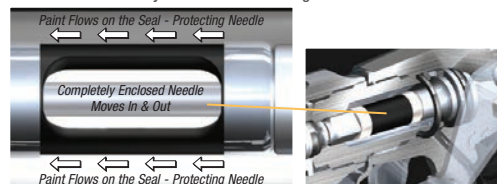

Needle is completely enclosed by the FlexSeal to provide consistent and quick shut-off, reducing spitting.

Other Industry Standard Gun Needle Designs

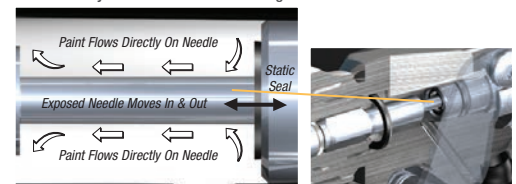

Paint flows directly on needle that moves in and out of a static seal – resulting in needle wear with every trigger pull.

Silver Plus™ Gun

Graco's Silver Plus Gun is known for its durability, long life, spraying performance and comfortable design. It is the preferred gun for high pressure applications.

DESCRIPTION	PART #
SILVER PLUS GUN WITH 2-FINGER TRIGGER	246240

- INCLUDES**
- RAC X 517 SwitchTip and Guard

SILVER PLUS GUN WITH 2-FINGER TRIGGER	243283
---------------------------------------	--------

- INCLUDES**
- RAC 5 517 SwitchTip and Guard

SILVER PLUS GUN WITH 2-FINGER TRIGGER	235460
---------------------------------------	--------

- INCLUDES**
- Flat Tip Guard

SILVER PLUS WITH 2-FINGER TRIGGER	235462
-----------------------------------	--------

- INCLUDES**
- Fine Finish Flat Tip Guard



Features

Lightweight, Rugged Design

- ▶ Durable forged aluminum withstands harsh work environments
- ▶ Lighter weight than competitive guns
- ▶ Polished body is easy to clean

Exclusive Needle Design

- ▶ Factory set needle needs no trigger adjustments
- ▶ Guaranteed for life against breakage
- ▶ Maximum performance and long life

2-Finger Trigger Design and Handle

- ▶ Form fitted handle for less fatigue
- ▶ Provides more control of gun while spraying

Stainless Steel Fluid Tube

- ▶ Fluid flows directly to the tip through the gun fluid tube, giving you the ability to spray heavier materials, such as high solid coatings and mastics, at up to 5000 psi (345 bar, 34.5 MPa)

RAC X SwitchTip™ and HandTite™ Guard

- ▶ Exceptional life, pattern and finish
- ▶ Seals when hand tightened - no tools required
- ▶ Quickly change from vertical to horizontal spray without loosening guard nut

Light Viscosity Needle Kit

- ▶ Included in Silver Plus Gun (Part No. 235462), or as an optional Needle Kit (Part No. 235475)
- ▶ Provides faster shut-off to reduce spitting of light viscosity material

Optional Accessories



Whip Hose provides more flexibility and increased operator control at the gun (238358).



Gun Filter Housing (210500) with Replaceable Tip Filters (224454 or 224453 tip filters).



Swivel for improved maneuverability at the gun (224457).

Heavy-Duty Texture Guns

The ideal guns for heavy coatings and joint compounds. These guns feature oversized passages and a filterless design for maximum flow and superior atomization.

DESCRIPTION	PART #
HEAVY-DUTY BLUE TEXTURE GUN WITH 4-FINGER TRIGGER	241705
INCLUDES	
• RAC X 531 SwitchTip	
• Heavy-Duty RAC Guard	
FLEX PLUS TEXTURE GUN WITH 2-FINGER TRIGGER	246468
INCLUDES	
• RAC X 517 SwitchTip	
• RAC X Guard	
INLINE HEAVY-DUTY TEXTURE GUN WITH FULL HAND TRIGGER	245820
INCLUDES	
• RAC 5 SwitchTip	



Heavy-Duty Blue Texture Gun



Flex Plus™ Texture Gun



Inline Heavy-Duty Texture Gun

Features

Oversized Fluid Path

- ▶ No-filter design offers minimal restriction and maximum flow
- ▶ Minimizes pack-out with heavy materials
- ▶ Reduces pressure drop for superior atomization

Ergonomic Design

- ▶ Form-fitting handles provide maximum control and comfort while spraying
- ▶ Optimized trigger and light weight design allows effortless, all-day spraying

Patented Needle Design






- ▶ Factory set needle needs no adjustment – *ever*
- ▶ Heavy-duty design for maximum performance and long life

Jobsite Proven

- ▶ Perfect for skim coat in a Level 5 finish, drywall mud, epoxies and a whole range of paints and primers
- ▶ Contractor preferred



AIRLESS SPRAY GUN SPECIFICATIONS

	PART #	TRIGGER	TIP	GUARD	REPAIR KIT	INSTRUCTION MANUAL	WORKING PRESSURE	FLUID ORIFICE DIAMETER
Contractor Gun								
	288420	2-Finger	RAC X 517	RAC X	288488	311861	3600 psi (248 bar, 24.8 MPa)	0.125 in (3.2 mm)
	288425	4-Finger	RAC X 517	RAC X	288488	311861	3600 psi (248 bar, 24.8 MPa)	0.125 in (3.2 mm)
	288421	2-Finger	RAC 5 515	RAC 5	288488	311861	3600 psi (248 bar, 24.8 MPa)	0.125 in (3.2 mm)
FTx Gun								
	288430	4-Finger	RAC X 515	RAC X	288488	311861	3600 psi (248 bar, 24.8 MPa)	0.125 in (3.2 mm)
	288429	2-Finger	RAC X 515	RAC X	288488	311861	3600 psi (248 bar, 24.8 MPa)	0.125 in (3.2 mm)
	288431	4-Finger	RAC X 515	RAC 5	288488	311861	3600 psi (248 bar, 24.8 MPa)	0.125 in (3.2 mm)
Silver Plus Gun								
	246240	2-Finger	RAC X 517	RAC X	235474 (For 235462 use repair kit 235475)	309740	5000 psi (345 bar, 34.5 MPa)	0.090 in (2.3 mm) 0.037 in (0.94 mm): 235462 for light viscosity materials
	243283	2-Finger	RAC X 517	RAC 5	235474 (For 235462 use repair kit 235475)	309740	5000 psi (345 bar, 34.5 MPa)	0.090 in (2.3 mm) 0.037 in (0.94 mm): 235462 for light viscosity materials
	235460	2-Finger	Not Included	Flat Tip	235474 (For 235462 use repair kit 235475)	309740	5000 psi (345 bar, 34.5 MPa)	0.090 in (2.3 mm) 0.037 in (0.94 mm): 235462 for light viscosity materials
	235462	2-Finger	Not Included	Fine Finish Flat Tip	235474 (For 235462 use repair kit 235475)	309740	5000 psi (345 bar, 34.5 MPa)	0.090 in (2.3 mm) 0.037 in (0.94 mm): 235462 for light viscosity materials
<ul style="list-style-type: none"> • Unique design with large fluid passages, heavy duty spring and 4-finger trigger makes this gun ideal for high solids, smooth textures, mastics, and protective coatings 								
Heavy Duty Texture Gun								
	241705	4-Finger	RAC X 531	Heavy Duty RAC	237260	308491	4000 psi (276 bar, 27.6 MPa)	0.125 in (3.2 mm)
<ul style="list-style-type: none"> • Lightest weight gun, available for airless spray and line striping applications • Airless hose connects directly to gun through spring guard mount on handle base 								
Flex Plus™ Gun								
	246468	2-Finger	RAC X 517	RAC X	235474	309741	5000 psi (345 bar, 34.5 MPa)	0.090 in (2.3 mm)
	248157	2-Finger	RAC 5 LineLazer® 319	RAC 5	235474	309741	5000 psi (345 bar, 34.5 MPa)	0.090 in (2.3 mm)

Hoses & Hose Fittings

BlueMax II Hose

Graco's BlueMax II Hose is the ideal choice for maximum performance. With superior flexibility and durability, BlueMax II is designed to ensure you get the best results from your airless sprayer.

XTreme-Duty Airless Hose

Graco's Xtreme-Duty Airless High-Pressure Hose is designed to withstand the rigors of high-pressure spraying. Wire-braided and with a maximum 4500 psi (310 bar, 31.0 MPa) working pressure, it's designed to meet the most exacting standards.

Blue Max II Hose

3300 psi (227 bar, 22.7 MPa) maximum working pressure rated at 180° F (82.2° C) temperature

Features

- ▶ Light weight and flexible - over 10% lighter weight and increased hose flexibility improves usability while spraying under pressure.
- ▶ Highest safety standards - conductive core meets the highest worldwide safety standards unlike competitive ground wire hose designs.
- ▶ Minimal hose coil memory - superior flexibility and reduced coil memory provides ease of use during coiling and uncoiling.
- ▶ Corrosion resistant - yellow zinc-plated spring guards are more corrosion resistant.



1/4 in x 50 ft Shown



Available in a wide variety of lengths and diameters.

PART #	DESCRIPTION	DIAMETER	LENGTH	TYPE
238358	BlueMax II Whip Hose	3/16 in (4.8 mm)	3 ft (0.9 m)	MxF
238959	BlueMax II Whip Hose	3/16 in (4.8 mm)	4.5 ft (1.4 m)	MxF
238359	BlueMax II Whip Hose	3/16 in (4.8 mm)	6 ft (1.8 m)	MxF
214981	BlueMax II Hose	3/16 in (4.8 mm)	15 ft (4.6 m)	FBE
214698	BlueMax II Hose	3/16 in (4.8 mm)	25 ft (7.5 m)	FBE
214697	BlueMax II Hose	3/16 in (4.8 mm)	50 ft (15 m)	FBE
223756	BlueMax II Hose	1/4 in (6.4 mm)	15 ft (4.6 m)	FBE
240793	BlueMax II Hose	1/4 in (6.4 mm)	25 ft (7.5 m)	FBE
240794	BlueMax II Hose	1/4 in (6.4 mm)	50 ft (15 m)	FBE
223771	BlueMax II Hose	1/4 in (6.4 mm)	100 ft (30 m)	FBE
240796	BlueMax II Hose	3/8 in (9.5 mm)	25 ft (7.5 m)	FBE
240797	BlueMax II Hose	3/8 in (9.5 mm)	50 ft (15 m)	FBE
241275	BlueMax II Hose	3/8 in (9.5 mm)	100 ft (30 m)	FBE



Synthetic-braided, 4000 psi (276 bar, 27.6 MPa) maximum working pressure rated at 180° (82.2° C)

277249	1/4 in x 3 ft (6.4 mm x 0.9 m) MxF Whip Hose
277250	1/4 in x 50 ft (6.4 mm x 15 m) FBE
277351	3/8 in x 3 ft (9.5 mm x 0.9 m) MxF Whip Hose
277251	3/8 in x 50 ft (9.5 mm x 15 m) FBE
277253	1/2 in x 50 ft (13 mm x 15 m) FBE



Whip Hose provides more flexibility and increased operator control at the gun (Part No. 238358).

XTreme-Duty Airless Hose



Wire-braided, 4500 psi (310 bar, 31.0 MPa) maximum working pressure rated at 180° (82.2° C)

H42503	1/4 in x 3 ft (6.4 mm x 0.9 m) FBE Whip Hose
H42550	1/4 in x 50 ft (6.4 mm x 15 m) FBE
H4251X	1/4 in x 100 ft (6.4 mm x 30 m) FBE
H43803	3/8 in x 3 ft (9.5 mm x 0.9 m) FBE Whip Hose
H43850	3/8 in x 50 ft (9.5 mm x 15 m) FBE
H4381X	3/8 in x 100 ft (9.5 mm x 30 m) FBE
H45050	1/2 in x 50 ft (13 mm x 15 m) FBE
H4501X	1/2 in x 100 ft (13 mm x 30 m) FBE

Selecting the RIGHT HOSE

Selecting the correct diameter hose to meet your length requirements is critical to maximize spraying pressure. The larger the hose diameter, the greater the pressure at the gun. As you go down in hose diameter size or increase the hose length, there will be less pressure at the gun, possibly affecting spray patterns.






When coupling hoses together, connect the larger diameter hose to the sprayer and smaller diameter hose to the gun inlet for maximum pressure when spraying. Use a whip hose to allow for flexibility when spraying.

Helpful Tips:






- ▶ 3/16 in-diameter (4.8 mm) Airless Hose is ideal for interior pressure rolling or low pressure applications
- ▶ 1/4 in-diameter (6.4 mm) Airless Hose is the most commonly sold hose diameter and is suitable for all applications
- ▶ 3/8 in-diameter (9.5 mm) Airless Hose delivers the best performance at the gun, and it can handle heavier material and longer hose length with the least amount of pressure drop

Hose Fittings, Unions, and Hose Accessories

FITTINGS

	156971	1/4 in npt x 1/4 in npt (6.4 mm x 6.4 mm) – MBE Maximum Working Pressure: 7500 psi (517 bar, 51.7 MPa)
	156849	3/8 in npt x 3/8 in npt (9.5 mm x 9.5 mm) – MBE Maximum Working Pressure: 6000 psi (420 bar, 42.0 MPa)
	158491	1/2 in npt x 1/2 in npt (13 mm x 13 mm) – MBE Maximum Working Pressure: 6700 psi (462 bar, 46.2 MPa)
	157350	1/4 in npt x 3/8 in npt (6.4 mm x 9.5 mm) – MBE Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)
	159239	1/2 in npt x 3/8 in npt (13 mm x 9.5 mm) – MBE Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)

UNIONS

	156823	1/4 in npt(m) x 1/4 in npsm(f) (6.4 mm x 6.4 mm) Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)
	155665	3/8 in npt(m) x 3/8 in npsm(f) (9.5 mm x 9.5 mm) Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)
	157705	1/4 in npt(m) x 3/8 in npsm(f) (6.4 mm x 9.5 mm) Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)
	159153	3/8 in npt(f) x 1/4 in npsm(f) (13 mm x 9.5 mm) Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)
	155570	1/4 in npt(f) x 1/4 in npsm(f) (6.4 mm x 9.5 mm) Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)

AIRLESS FITTINGS PAK



The Airless Fittings Pak provides an assortment of the most commonly sold adapters, fittings, swivel unions and gaskets in an organized carrying case. All parts are pictured and labeled on the inside cover, making re-ordering easy. See your local distributor to order the Airless Fittings Pak.

Gun & Hose Kits

Graco has made it easy to get up and spraying quickly with our Gun and Hose kits. These kits combine our most popular gun and hose combinations into economical packages that fit any applicaiton.

Whether you're applying fine finish, texture, heavy mastics, latex or oil based paints, we have a gun kit ready. And, keeping a spare kit on hand means you're always prepared for large projects where dual gun applications are required.



288425 Gun shown



241705 Gun shown

RAC X	GUN	BLUEMAX II AIRLESS HOSE	HOSE WPR	TIP	INCLUDES
288489	Contractor	1/4 in x 50 ft (6.4 mm x 15 m)	3300 psi (227 bar, 22.7 MPa)	RAC X 517	HandTite Guard, 3 ft (0.9 m) Whip Hose
288490	Contractor	3/8 in x 50 ft (9.5 mm x 15 m)	3300 psi (227 bar, 22.7 MPa)	RAC X 517	HandTite Guard, 3 ft (0.9 m) Whip Hose
288500	Contractor	3/8 in x 50 ft (9.5 mm x 15 m)	3300 psi (227 bar, 22.7 MPa)	RAC 5 517	HandTite Guard 3 ft (0.9 m) Whip Hose
288493	FTx	1/4 in x 50 ft (6.4 mm x 15 m)	3300 psi (227 bar, 22.7 MPa)	RAC X 515	HandTite Guard
287041	Silver Plus	1/4 in x 50 ft (6.4 mm x 15 m)	3300 psi (227 bar, 22.7 MPa)	RAC X 517	HandTite Guard, 3 ft (0.9 m) Whip Hose
287042	Silver Plus	3/8 in x 50 ft (9.5 mm x 15 m)	3300 psi (227 bar, 22.7 MPa)	RAC X 517	HandTite Guard, 3 ft (0.9 m) Whip Hose
287043	Silver Plus	3/8 in x 50 ft (9.5 mm x 15 m)	4000 psi (276 bar, 27.6 MPa)	RAC X 517	HandTite Guard, 3 ft (0.9 m) Whip Hose
287095	Flex Plus	1/4 in x 50 ft (6.4 mm x 15 m)	3300 psi (227 bar, 22.7 MPa)	RAC X 517	HandTite Guard, 3 ft (0.9 m) Whip Hose
287850	Silver Plus	3/8 in x 50 ft (9.5 mm x 15 m)	4000 psi (276 bar, 27.6 MPa)	RAC X 517	HandTite Guard, RAC X 655Tip 1/4 in x 3 ft (6.3 mm x 0.9 m) Whip Hose
287851	Flex Plus	3/8 in x 50 ft (9.5 mm x 15 m)	4000 psi (276 bar, 27.6 MPa)	RAC X 517	HandTite Guard, RAC X 655 Tip 1/4 in x 3 ft (6.3 mm x 0.9 m) Whip Hose
241338	HD Texture	3/8 in x 50 ft (9.5 mm x 15 m)	3300 psi (227 bar, 22.7 MPa)	RAC X 531	RAC X Guard, RAC X 427 Tip 1/4 in x 3 ft (6.4 mm x 0.9 m) Whip Hose
287852	HD Texture	3/8 in x 50 ft (9.5 mm x 15 m)	4000 psi (276 bar, 27.6 MPa)	RAC X 531	RAC X Guard, RAC X 655 Tip 1/4 in x 3 ft (6.4 mm x 0.9 m) Whip Hose



288425 Gun shown

RAC X FINE FINISH	GUN	BLUEMAX II AIRLESS HOSE	HOSE WPR	TIP	INCLUDES
288501	Contractor	3/16 in x 25 ft (4.8 mm x 7.5 m)	3300 psi (227 bar, 22.7 MPa)	RAC X FFT210	HandTite Guard, FFT312 Tip 10 in (25 cm) Tip Extension (2) 100 Mesh Gun Filters Solvent Seal Kit Cleaning Brush
287823	Silver Plus .037 in (.94 mm) orifice	3/16 in x 25 ft (4.8 mm x 7.5 m)	3300 psi (227 bar, 22.7 MPa)	RAC X FFT210	HandTite Guard, FFT312 Tip 10 in (25 cm) Tip Extension (2)100 Mesh Tip Filters Gun Filter Housing Solvent Seal Kit Cleaning Brush



288421 Gun shown

		BLUEMAX II				
RAC 5	GUN	AIRLESS HOSE	HOSE WPR	TIP	INCLUDES	
288496	Contractor	1/4 in x 50 ft (6.4 mm x 15 m)	3300 psi (227 bar, 22.7 MPa)	RAC 5 517	HandTite Guard, 3 ft (0.9 m) Whip Hose	
288497	FTx	1/4 in x 50 ft (6.4 mm x 15 m)	3300 psi (227 bar, 22.7 MPa)	RAC 5 515	HandTite Guard	
243321	Silver Plus	1/4 in x 50 ft (6.4 mm x 15 m)	3300 psi (227 bar, 22.7 MPa)	RAC 5 517	HandTite Guard, 3 ft (0.9 m) Whip Hose	



RAC IV Gun shown

RAC IV	GUN	AIRLESS HOSE	HOSE WPR	TIP	INCLUDES
243105	SG3	1/4 in x 50 ft (6.4 mm x 15 m)	3000 psi (207 bar, 20.7 MPa)	RAC IV 515	RAC IV Guard

GUN ADAPTER



Part #
210500

- ▶ Gun Filter Housing - connects to gun inlet for added filtration
- ▶ Use tip filters 224454 and 224453
- ▶ 1/4 in npsm(m), 1/4 in npsm(f), Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)



GUN ADAPTER

Part #
224457

- ▶ Gun Swivel - provides a swiveling joint between gun and hose for free gun movement
- ▶ Install at gun inlet
- ▶ 1/4 in npsm(m), 1/4 in npsm(f), Maximum Working Pressure: 3600 psi (248 bar, 24.8 MPa)



GUN ADAPTER

Part #
181085

- ▶ Gun Adapter - converts 11/16 in (17.5 mm) gun thread on competitive guns to accept the 7/8 in (22 mm) thread used on most Graco accessories.

Spray Tips

In any spray application, the quality of your work is only as good as the quality of your finish. Graco spray tips are built to the highest standards and ensure the best finish in the industry. Each Graco tip is 100% tested for flow rate to meet the tough standards of painting contractors, and these careful processes ensure you of the quality you've come to expect from Graco.

MATERIALS RECOMMENDED TO BE SPRAYED	TIP SIZES
Oil Base Stains, Lacquers and Clear Coats*	0.009 - 0.013
Oil Base Enamels, Industrial Enamels	0.013 - 0.015
Latex Paint	0.015 - 0.019
Heavy Latex and Smooth Elastometrics	0.021 - 0.025
Elastometrics and Block Fillers	0.025 - 0.039

This chart is a guide only—actual tip sizes used will vary depending on material.

**Fine Finish tip recommended.*

Choosing the RIGHT TIP for your spraying project is essential.

Graco tips are easy to identify. Choosing a quality tip will determine the quality of your finish and help you save a significant amount of time and money. Each Graco tip is 100% tested for flow rate to meet the tough standards of painting contractors. These careful processes ensure you of the quality you've come to expect from Graco.

For Example: RAC X LTX517

1. The first three digits (LTX) are Graco's identification numbers which differentiate various tip styles. An LTX is a Graco RAC X SwitchTip. The second three digits (517) represent the actual tip size (fan and orifice).
2. The number (5), when doubled, indicates approximate fan width when spraying 12 inches (305 mm) from the surface. The fan width on a 517 tip is approximately 10 to 12 inches (254 mm to 305 mm). All Graco tips are tested 12 inches (305 mm) from the surface with the same test material, at the same spraying pressure (LL5 at 6 inches). Different materials and spraying pressures may slightly change the width of your actual fan pattern.
3. The last two digits (17) indicate the tip has a hole size of 0.017 of an inch (0.43 mm). The hole size is directly related to the amount of paint that will flow through the tip. Your actual flow rate will depend on your spraying pressure and the paint you are using (high pressure equals more flow; heavier paints equals less flow).

Worn Tips Cost Time and Money

- ▶ A worn tip uses more paint
- ▶ Produces uneven coverage and inconsistent mil build
- ▶ Reduces production – requires more passes
- ▶ Results in a poor quality finish

Rules On Selecting Tip Sizes

- ▶ Use smaller orifice sizes when applying light viscosity materials such as stains and lacquers
- ▶ Use larger orifice sizes for heavier viscosity coatings such as latex or oil base



The 517 indicates the tip size:

- The fan size is double the first digit (5), or 10 inches.
- The orifice size is (17) thousandths of an inch or .017.

Tip Wear Chart



12 in. (305 mm) 11 in. (280 mm) 9 in. (229 mm) 5.5 in. (140 mm)

If a contractor is using a worn tip, on average he will spray 25% additional paint and use an additional 20% of labor.

RAC X SwitchTips

Graco has developed a full-range RAC X SwitchTip product line to cover every application on the market today! RAC X SwitchTips include larger sizes for heavy-duty applications requiring 4000 psi (276 bar) and below, and smaller sizes for the finishing work.

DESCRIPTION **PART #**
RAC X LTXxxx

APPLICATIONS
Residential, Commercial
or Industrial

MATERIALS
Lacquers to Mastics

WIDERAC **WRXxxx**

APPLICATIONS
High Production,
New Construction

MATERIALS
Lacquers to Mastics

FINE FINISH **FFTxxx**

APPLICATIONS
Metal, Woodwork

MATERIALS
Lacquer, Varnish, Stain,
Enamel, Oil Base Paint



Features

Best Tip on the Market (Blue Handle)

- ▶ Premium airless tip line includes 107 RAC X SwitchTips for every application
- ▶ Longest lasting fan pattern
- ▶ Highest quality finish
- ▶ Available in the most common tip sizes

Easy to Identify Tip Size

- ▶ Large raised tip size numbers are always legible, even when covered with paint

Superior Tip Design

- ▶ Locking tab ensures tip stays securely in guard
- ▶ “Snaps” tip in spray or reverse position
- ▶ OneSeal™ tip installs with no tools
- ▶ Solvent seal available when using extremely hot solvents


RAC X – WideRAC™ (Blue Handle)

- ▶ Spray double the area in half the time while ensuring proper mil build
- ▶ Ideal for high production and new construction applications which may require larger airless sprayers


RAC X – Fine Finish (Green Handle)

- ▶ Pre-orifice design improves the overall finish quality with finer atomization and soft edges for overlapping
- ▶ Sprays at lower pressures
- ▶ Easier to clean and less likely to plug
- ▶ Includes solvent seal for extremely hot solvents

WideRAC can cover the same area in 3 passes and in half the time!



24 in (610 mm)
Pattern with WideRAC



12 in (305 mm)
Pattern with Standard Tip



WideRAC Tips – Complete jobs in half the time.
Extra wide pattern, 24 in (61 cm) (WRxxx).

RAC X Fine Finish Tips – Pre-orifice produces finer
atomization resulting in the highest quality finish (FFTxxx).

RAC 5 SwitchTips

RAC 5 SwitchTips are high-performance tips and are one of the most popular reversible spray tips on the market today. RAC 5 provides excellent fan pattern life and a high quality finish. Easy-to-identify laser stamped tip sizes ensure you'll always know what tip size you're using.

DESCRIPTION	PART #
RAC 5	286xxx

APPLICATIONS

Residential, Commercial or Industrial

MATERIALS

Lacquers to Mastics

LINELAZER	LL5XXX
------------------	---------------

APPLICATIONS

Pavement, Concrete, Turf

MATERIALS

Water Base, Alkyd

XHD RAC	XHDXXX
----------------	---------------

APPLICATIONS

Steel, Roofing

MATERIALS

Industrial Paints, Coatings



RAC 5 LineLazer SwitchTip (LL5xxx)



XHD RAC SwitchTip (XHDxxx)

Features

RAC 5 SwitchTip (Black Handle)

- ▶ For residential and commercial applications
- ▶ Includes OneSeal for most common coatings
- ▶ Solvent seal available when using extremely hot solvents









RAC 5 SwitchTip (Yellow Handle – for LineLazer™)

- ▶ Creates clean, laser-sharp lines with no fuzzy edges or thin spots
- ▶ Designed specifically for parking lots, roads, warehouse floors, crosswalks and athletic fields
- ▶ Sprays heavy water-based to thin alkyd traffic paints
- ▶ Ensures consistent paint thickness from edge to edge, less overspray, and long-lasting lines

XHD™ RAC SwitchTip (Gray Handle)

- ▶ Recommended for Xtreme® Sprayers and XTR Airless Spray Guns
- ▶ Interchangeable with GHD guards and tips
- ▶ Change tip in seconds, no tools required
- ▶ Locking tab ensures tip stays securely in tip guard

TIP SPECIFICATIONS

PART #	COLOR	MAXIMUM WPR	TYPICAL APPLICATIONS	BEST USED WITH THESE MATERIALS	TIP GUARD PART #
RAC X SwitchTip					
LTXxxx 	Blue	4050 psi (280 bar, 28.0 MPa)	Residential, Commercial or Industrial	Lacquers to Mastics Latex Paints	RAC X HandTite 246215
WideRAC RAC X SwitchTip					
WRxxx 	Blue	4050 psi (280 bar, 28.0 MPa)	High Production, New Construction for Top Coats, Large Concrete and Block Surfaces	Lacquers to Mastics Latex Paints	RAC X HandTite 246215
Fine Finish RAC X SwitchTip					
FFTxxx 	Green	4050 psi (280 bar, 28.0 MPa)	Cabinetry, Woodworking, Metal and Fine Finish Surfaces	Lacquers, Varnishes, Urethanes and Other Fine Finish Materials	RAC X HandTite 246215
RAC 5 SwitchTip					
286xxx 	Black	4050 psi (280 bar, 28.0 MPa)	Residential, Commercial or Industrial	Lacquers to Mastics Latex Paints	RAC 5 HandTite 243161
RAC 5 SwitchTip (for LineLazer)					
LL5xxx 	Yellow	4050 psi (280 bar, 28.0 MPa)	Parking Lots, Roads, Warehouse Floors, Crosswalks, Athletic Fields	Heavy Waterbase to Thin Alkyd Traffic Paints	RAC 5 HandTite 243161
XHD RAC SwitchTip					
XHDxxx 	Gray	7250 psi (500 bar, 34.5 MPa)	Bridges, Tanks, Farms, Structural Steel and Roofing	Virtually All Paints and Coatings – Solvent and Waterbase	XHD XHD001
Contractor Flat Tip					
269xxx 	Silver	7250 psi (500 bar, 34.5 MPa)	Residential, Commercial	Architectural Coatings or Industrial	Flat Tip 220251
Fine Finish Flat Tip					
163xxx 	Black	5000 psi (345 bar, 34.5 MPa)	Residential, Commercial	Architectural Coatings or Industrial	Flat Tip 220247

TIPS & GUARDS

Tip Charts



RAC X SwitchTips (LTXxxx)

Orifice Size - Inches

Fan Width	IN (MM)		Orifice Size - Inches																						
	.007	.009	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035	.037	.039	.041	.043	.045	.051	.055	.061	.065	.071
2-4 (51-102)		109	111		115																				
4-6 (102-152)	207	209	211	213	215	217	219	221		225	227		231		235										
6-8 (152-203)		309	311	313	315	317	319	321	323	325	327	329	331		335										
8-10 (203-254)		409	411	413	415	417	419	421	423	425	427	429	431	433	435		439	441	443	445	451	455			
10-12 (254-305)		509	511	513	515	517	519	521	523	525	527	529	531	533	535	537	539	541	543	545	551	555	561		
12-14 (305-356)			611	613	615	617	619	621	623	625	627	629	631	633	635	637	639	641	643	645	651	655	661	665	671
14-16 (356-406)								721	723			729			735										
16-18 (406-XXX)						817	819	821			827		831	833	835										
Flow Rate (gpm)	.05	.09	.12	.18	.24	.31	.38	.47	.57	.67	.77	.90	1.03	1.17	1.31	1.47	1.63	1.8	1.98	2.17	2.79	3.25	4.0	4.53	5.41
Flow Rate (lpm)	.20	.33	.49	.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	5.56	6.18	6.83	7.51	8.23	10.57	12.29	15.12	17.17	20.48

Water at 2000 psi (138 bar, 13.8 MPa); paints with a higher viscosity will decrease the flow rate. **Example:** For a tip with a .015 orifice and a 6 in (152 mm) pattern, order LTX315.



WideRAC RAC X SwitchTips (WRxxxx)

Orifice Size - Inches

Fan Width	IN (MM)		Orifice Size - Inches									
	.021	.023	.025	.027	.029	.031	.033	.035	.037	.039		
24 (610)	1221	1223	1225	1227	1229	1231	1233	1235	1237	1239		
Flow Rate (gpm)	.47	.57	.67	.77	.90	1.03	1.17	1.31	1.47	1.63		
Flow Rate (lpm)	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	5.56	6.18		

Water at 2000 psi (138 bar, 13.8 MPa); paints with a higher viscosity will decrease the flow rate. **Example:** For a tip with a .027 orifice and a 24 in (610 mm) pattern, order WR1227.

WideRAC Conversion

RAC 5 or RAC X	WideRAC
415 or 515	1221 or 1223
417 or 517	1223 or 1225
419 or 519	1225 or 1227
421 or 621	1229 or 1231
523 or 623	1233 or 1235
525 or 625	1235 or 1237

When you use WideRAC, be sure to increase the orifice size of the tip to ensure the same mil build and rate of application (arm speed). Also, make sure your airless sprayer can support the larger tip size.



Fine Finish RAC X SwitchTips (FFTxxx)

Orifice Size - Inches

Fan Width	IN (MM)		Orifice Size - Inches			
	.008	.010	.012	.014		
2-4 (51-102)	108	110	112			
4-6 (102-152)	208	210	212	214		
6-8 (152-203)	308	310	312	314		
8-10 (203-254)		410	412	414		
10-12 (254-305)		510	512	514		
12-14 (305-356)			612	614		
Flow Rate (gpm)	.07	.11	.15	.21		
Flow Rate (lpm)	.26	.41	.59	.80		

Water at 2000 psi (138 bar, 13.8 MPa); paints with a higher viscosity will decrease the flow rate.

Example: For a tip with a .010 orifice and a 8 in (203 mm) pattern, order FFT410.



RAC 5 SwitchTips (286xxx)

Orifice Size - Inches






Fan Width	IN (MM)		Orifice Size - Inches																					
	.007	.009	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035	.039	.043	.045	.051	.055	.063	.065		
2-4 (51-102)		109	111	113	115		119	121																
4-6 (102-152)	207	209	211	213	215	217	219	211	223	225					235									
6-8 (152-203)	307	309	311	313	315	317	319	321	323	325	327		331											
8-10 (203-254)		409	411	413	415	417	419	421	423	425	427	429		433	435	439	443		451	455				
10-12 (254-305)		509	511	513	515	517	519	521	523	525	527	529	531	533	535		543		551	555	563			
12-14 (305-356)		609	611	613	615	617	619	621	623	625	627	629	631	633	635		645			655				
14-16 (356-406)								721	723	725		729			735									
16-18 (406-457)					815	817	819	821			827		831	833	835									
18-20 (457-508)						917									935									
Flow Rate (gpm)	.05	.09	.12	.18	.24	.31	.38	.47	.57	.67	.77	.90	1.03	1.17	1.31	1.63	1.98	2.17	2.79	3.25	4.26	4.53		
Flow Rate (lpm)	.20	.33	.49	.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	6.18	7.51	8.23	10.57	12.29	16.13	17.17		

Water at 2000 psi (138 bar, 13.8 MPa); paints with a higher viscosity will decrease the flow rate.

Example: For a tip with a .011 orifice and a 6 in (152 mm) pattern, order 286311.

Tip Guards

Proven quality and maximum performance are designed and built into every tip guard made by Graco.

TIP GUARDS	PART #s	THREAD SIZES	GUNS	TIPS
 RAC X HandTite™	246215	7/8 in (22 mm)	Standard Graco thread	RAC X, FFT, WR
	246437	11/16 in (17.5 mm)	Older style Graco Pole Guns, Fits Competitive Guns with 11/16 in threads	RAC X, FFT, WR
 RAC 5 HandTite	243161	7/8 in (22 mm)	Standard Graco thread	RAC 5, RAC IV
	243263	11/16 in (17.5 mm)	Older style Graco Pole Guns	LineLazer RAC 5
 XHD RAC	XHD001	7/8 in (22 mm)	Standard Graco thread	XHD RAC
 Flat	220251	7/8 in (22 mm)	Standard Graco thread	Contractor
	220255	11/16 in (17.5 mm)	Older style Graco Pole Guns, Fits Competitive Guns with 11/16 in threads	Contractor
 Fine Finish Flat	220247	7/8 in (22 mm)	Standard Graco thread	Fine Finish Flat
	220249	11/16 in (17.5 mm)	Older style Graco Pole Guns, Fits Competitive Guns with 11/16 in threads, Tip Filter Housings and Swivel Adapters	Fine Finish Flat

Seals & Gaskets

TIP GASKETS AND SEAL KITS

- ▶ Compatible with most fluids; easy installation without tools
- | | |
|--------|--|
| 246453 | RAC X OneSeals – 5 pack. Use only with RAC X SwitchTip and Guard |
| 243281 | RAC 5 OneSeals – 5 pack. Use only with RAC 5 SwitchTip and Guard |



- | | |
|--------|--|
| 248936 | RAC X Solvent Seal Kit – 5 pack |
| 224081 | RAC 5 OneSeals – 5 pack. Use only with RAC 5 SwitchTip and Guard |
| 223373 | Thin Tip Gaskets – 25 pack |
| 223374 | Thick Tip Gaskets – 25 pack – use with tip extensions |
| 114049 | O-Ring – use with tip gaskets to securely hold in place |
| 258017 | Heavy-duty extension gaskets – 5 pack |



TIP BRUSHES

- ▶ Use to clean spray tips, filters and guns.
- | | |
|--------|--|
| 101891 | 3/8 in x 2.25 in (9.5 mm x 57.15 mm) nylon bristle |
| 101892 | 5/8 in x 2.25 in (16 mm x 57.15 mm) nylon bristle |
| 119799 | 3/8 in x 1 in (9.5 mm x 25.4 mm) nylon bristle |



Pressure Rollers & Accessories

Painting with a roller has never been this easy! No more climbing and stopping to dip the roller in a messy paint tray. Simply pull the gun trigger when you need more paint and keep rolling. Pressure rolling is ideal when spraying is not possible.

DESCRIPTION	PART #
EvenFlow Pressure Roller Assembly	244279

MAXIMUM WPR
3600 psi (248 bar, 24.8 MPa)

INCLUDES

- 9 in (230 mm) EvenFlow Roller Frame
- 1/2 in (13 mm) Roller Cover
- 20 in (50 cm) Fixed Extension & 45° angle

EvenFlow Telescoping Roller Assembly	244281
--------------------------------------	--------

MAXIMUM WPR
3000 psi (227 bar, 22.7 MPa)

INCLUDES

- 18 in to 36 in (46 cm to 91 cm) Telescoping Extension
- 9 in (230 mm) EvenFlow Roller Frame
- 1/2 in (13 mm) Roller Cover

EvenFlow In-Line Valve Roller Assembly	245397
--	--------

MAXIMUM WPR
3600 psi (248 bar, 24.8 MPa)

INCLUDES

- 1 Contractor In-Line Valve
- 20 in (50 cm) Fixed Extension
- 9 in (230 mm) EvenFlow Roller Frame
- 1/2 in (13 mm) Roller Cover



Geospense™ 12 in (305 mm) Pressure Roller



9 in (230 mm) EvenFlow Roller Frame



Graco perforated Roller Covers

Features

EvenFlow™ 9 in (230 mm) Pressure Roller

- ▶ Evenly distributes paint without heavy build-up
- ▶ Chrome plated, stainless steel frame resists corrosion
- ▶ Lighter design for less fatigue
- ▶ Few parts for quick cleaning and easy tool-free assembly between color changes
- ▶ Typical pressure roller application requires 300 psi (21 bar , 2.1 Mpa)

EvenFlow Pressure Roller Assembly

- ▶ Airless spray gun roller attachment includes everything you need to start rolling with an airless spray gun

EvenFlow In-Line Valve Roller Assembly

- ▶ Includes everything you need to start rolling with the Contractor In-Line Valve
- ▶ Rotates 180° for rolling in tight areas

EvenFlow Telescoping Roller Assembly

- ▶ Connects directly to Contractor In-Line Valve or any airless spray gun with a 45° angle (sold separately, part number 224399)

PRESSURE ROLLER FRAMES

244271	9 in (230 mm) EvenFlow Roller Frame with 7/8 in (22 mm) thread; for use with Graco Heavy Duty Extensions
244623	9 in (230 mm) EvenFlow Roller Frame with 1/8 npt thread; for use with Graco Telescoping Extensions
224398	Adapter that attaches roller frame 244623 to use with Heavy Duty Extension
240005	9 in (230 mm) Geospense™ Roller Frame with 7/8 in (22 mm) thread
240055	12 in (305 mm) Geospense Roller Frame with 7/8 in (22 mm) thread

ROLLER COVERS

107589	9 in (230 mm) Roller Cover, 3/8 in (9.5 mm) nap
107590	9 in (230 mm) Roller Cover, 1/2 in (13 mm) nap
107591	9 in (230 mm) Roller Cover, 3/4 in (19 mm) nap
186944	12 in (305 mm) Roller Cover, 1/2 in (13 mm) nap
186945	12 in (305 mm) Roller Cover, 3/4 in (19 mm) nap

JetRoller

Lightweight and portable, the JetRoller consists of a spray roller, a spray extension and a hand roller in one complete kit. It fits existing airless sprayers and is the ideal time-saving addition to your painting arsenal. The JetRoller combines rolling and spraying into one action, saving time and labor on spray/back roll projects. Ideal for rough or porous surfaces, the JetRoller minimizes overspray and delivers a consistent quality finish.

DESCRIPTION **PART #**
 JetRoller System 24U170

INCLUDES

- 9 in Roller Handle Assembly
- 12 in Roller Handle Extension
- 20 in Heavy Duty Extension
 - CleanShot Shut-Off Valve
 - Rac X 721 Switch Tip and Guard

JetRoller System 24U172

INCLUDES

- 9 in Roller Handle Assembly
- 12 in Roller Handle Extension
- 20 in Heavy Duty Extension
- CleanShot Shut-Off Valve
- Rac X 721 Switch Tip and Guard
- Contractor In-Line Valve

JetRoller System (Canada) 24V926

INCLUDES

- 9.5 in Roller Handle Assembly
- 12 in Roller Handle Extension
- 20 in Heavy Duty Extension
- CleanShot Shut-Off Valve
- Rac X 721 Switch Tip and Guard
- Contractor In-Line Valve

JetRoller System 24W128

INCLUDES

- 18 in Adjustable Roller Handle Assembly
- 12 in Roller Handle Extension
- 20 in Heavy Duty Extension
- CleanShot Shut-Off Valve
- WR 1223 Switch Tip and Guard
- Contractor In-Line Valve

JetRoller Parts/Accessories

- 9 in Roller Handle Assembly 24V829
- 9.5 in Roller Handle Assembly (Canada) 24V937
- 12 in Roller Handle Extension 24V832
- 45° Adapter 224399
- 6 ft BlueMax II Whip Hose 238359
- 18 in Roller Handle Assembly 24W130

ROLL YOUR PROJECT IN HALF THE TIME!



Features

Saves Time & Money

- ▶ Combines rolling and spraying into one action

In-line Valve

- ▶ Eliminates dipping the roller in paint and is up to 2x faster than standard rolling

Easily Detachable Handle

- ▶ Use the spray extension or hand roller independently

CleanShot™ Shut-Off Valve

- ▶ Eliminates spits and drips

Minimal Prep Time Required

- ▶ Very low overspray design means less area preparation
- ▶ Suitable for finish coats in furnished spaces

Flexible

- ▶ Uses industry standard roller covers and extensions (Roller cover not included)



ROLLERS & ACCES.

Extended Reach Tools

Graco's full line of Extended Reach Tools are ideal for hard-to-reach areas like soffits, stairways and vaulted ceilings. Extend your range and spray more efficiently without ladders or scaffolding.

DESCRIPTION	PART #
3' Pole Gun (0.9 m)	287023
MAXIMUM WPR 3600 (248 bar, 24.8 MPa)	
6' Pole Gun (1.8 m)	287024
MAXIMUM WPR 3600 (248 bar, 24.8 MPa)	
CleanShot Valve	287030
MAXIMUM WPR 3600 (248 bar, 24.8 MPa)	
REPAIR KIT Valve - 244162 Swivel - 244363	



3' Pole Gun Shown

Features

Pole Gun

- ▶ For unmatched spraying performance in high or recessed areas
- ▶ Provides better spray control and less fatigue
- ▶ Balanced design; no excessive weight at the end of pole

CleanShot™ Shut-Off Valve


- ▶ Unique needle valve shuts fluid off at the tip for a clean pattern – no spitting
- ▶ 180° tip swivel provides versatility when spraying walls and ceilings
- ▶ Pressure-actuated – operates at a minimum of 700 psi (4.8 Mpa, 48 bar)

Contractor In-Line Valve

- ▶ Can be used with other extended reach tools such as Heavy Duty Extensions and Telescoping Extensions for Pressure Rolling
- ▶ Provides a straight connection to extensions for the most optimal rolling position
- ▶ In-handle paint filter and built-in swivel connection for top spraying performance
- ▶ Ability to rotate 180° allows spraying in any position

Pole Gun Extensions

- ▶ Use with Contractor In-Line Valve and the CleanShot Shut-Off Valve to create different length pole guns
- ▶ Smaller diameter tube is lightweight and can be used for interior pressure rolling
- ▶ Ability to attach directly to an airless spray gun – order 45° adapter 224399 for increased comfort while rolling



CleanShot® Shut-Off Valve (287030)



Contractor In-Line Valve (244161)

Extended Reach Accessories



Pole Gun Extensions

Maximum WPR: 3600 psi, (248 bar, 24.8 MPa)

- ▶ Use with Contractor In-Line Valve and the CleanShot Shut-Off Valve to create different length pole guns
- ▶ Thread Size: 7/8 in (22 mm)
- 244163 3 ft (0.9 m)
- 244164 6 ft (1.8 m)



RAC X Tip Extensions

Maximum WPR: 4050 psi, (280 bar, 28.0 MPa)

- ▶ Includes: RAC X HandTite Guard standard with 7/8 in (22 mm) gun nut and OneSeal
- ▶ Can be combined for extended reach up to 6 ft (1.8 m)
- 287019 10 in (25 cm) 287021 20 in (50 cm)
- 287020 15 in (38 cm) 287022 30 in (75 cm)



RAC 5 Tip Extensions

Maximum WPR: 4050 psi, (280 bar, 28.0 MPa)

- ▶ Includes: RAC X HandTite Guard standard with 7/8 in (22 mm) gun nut and OneSeal
- ▶ Can be combined for extended reach up to 6 ft (1.8 m)
- 243295 10 in (25 cm) 243297 20 in (50 cm)
- 243296 15 in (38 cm) 243298 30 in (75 cm)



Heavy Duty Extensions

Maximum WPR: 3600 psi, (248 bar, 24.8 MPa)

- ▶ Tough, light weight aluminum construction
- ▶ Can be combined for extended reach up to 12 ft (3.6 m)
- ▶ Attach to any airless spray gun or In-Line Valve
- ▶ Ideal for high pressure spraying or low pressure roller application:
- 232121 10 in (25 cm) 232124 60 in (150 cm)
- 232122 20 in (50 cm) 232125 80 in (200 cm)
- 232123 40 in (100 cm)



Telescoping Extensions

Maximum WPR: 3000 psi, (207 bar, 20.7 MPa)

- ▶ Use Telescoping Extensions for Pressure Rolling only - do not use for airless spraying
- ▶ All Telescoping Extensions include Adapter 244825; for use with 7/8 in (22 mm)
- ▶ Contractor In-Line Valve
- 218775 18 to 36 in (45 to 90 cm)
- 218776 36 to 72 in (90 to 180 cm)
- 218777 72 to 144 in (180 to 360 cm)

ADAPTERS



235486



224399

180° Easy Turn Directional Spray Nozzle

- ▶ Sprays at a variety of angles by attaching to any Graco Extensions
- ▶ Maximum Working Pressure: 3600 psi (248 bar, 24.8 MPa)
- ▶ Thread Size: 7/8 in (22 mm)
- ▶ Instruction Manual: 308244

45° Adapter

- ▶ Connects to Airless Spray Gun and any Graco Extension for use with Pressure Roller or JetRoller
- ▶ Maximum Working Pressure: 3600 psi (248 bar, 24.8 MPa)
- ▶ Thread Size: 7/8 in (22 mm)

ROLLERS & ACCES.

Strainers & Gun Filters

The easiest way to maximize spray performance is to use Graco brand strainers and filters in your sprayers and guns.

Using and maintaining filters also saves time and money by extending the life of your equipment and reducing project down time.

Designed for easy field replacement, it's a great idea to keep an extra strainer, manifold filter and gun filter with you on every project.








INLET STRAINERS

► A strainer prevents foreign objects from entering into the pump and provides the first stage of filtration.

	246385	7/8 in (unf) thread - Nylon Cap	390, 490, Ultra™ 395/495/595 Ultra Max 695 Lo-Boy, GMax™ 3400, LineLazer 3400, FinishPro 390, FinishPro 395
	235004	3/4 in (unf) thread - Nylon Cap	ST, STX, 295 ST, 395/495 ST Pro Stand, 455/495ST Pro Lo-Boy, Ultra Max 695/795 Lo-Boy, GM3000 Lo-Boy, 390/395/450/455/490/495ST Stand, Ultra 600 Lo-Boy
	183770	3/4 in (npsm) thread - SST Cap	455/495ST Pro Hi-Boy, Ultra Max 695 Hi-Boy, GM3000 Hi-Boy, LineLazer 3000, 495ST Hi-Boy, Ultra 500 Hi-Boy, LineLazer 3500
	181072	1 in (npsm) thread - SST Cap Double Screen	Ultra Max 795/1095/1595 Hi-Boy, GMax 3900, GMax 5900 Lo-Boy, LineLazer 3900/5900, EM 590, Ultra 750/1000/1500, GM 3500/5000, Ultra 333/433, GM7000 Lo-Boy, LineLazer 5000
	189920	1 in (npsm) thread - SST Cap Single Screen	Ultra Max II 695/795/1095/1595, GMax II 3900/5900/7900, GH™ 200/230/300, LineLazer 200HS, Mark IV, Mark V™, GMax 5900/5900 HD Hi-Boy, GMax 7900, HydraMax™ 225, GM 7000 Hi-Boy
	237840	1 1/4 in (npt) thread - SST Cap	HydraMax 300/350, GM/GMax 10000, GH 733, GH 833
	237675	1/2 in (npsm) thread - Nylon Cap	490st Hi-Boy, Ultra 600 Lo-Boy
	237820	Twist Lock, Nylon (unf)	390sts
	181073	1/2 in (npt) thread - SST Cap	EM390™, EM490™, Ultra 400, Ultra 500 Lo-Boy
	257033	1 in (npsm) thread - Crush-proof design for unmatched pump protection	Ultra Max II 1095/1595

GUN FILTERS

► A filter helps reduce tip plugging and provide a better quality finish by eliminating large unwanted particles from the spray pattern.

	257129	New Contractor (Contractor II, FTx Guns) 30 Mesh - 1 per card
	257130	New Contractor (Contractor II, FTx Guns) 200 Mesh - 1 per card
	287032	New Contractor (Contractor II, FTx Guns) 60 Mesh - 1 per card
	287033	New Contractor (Contractor II, FTx Guns) 100 Mesh - 1 per card
	287034	New Contractor (Contractor II, FTx Guns) 60 & 100 Mesh - 1 per card
	218131	Old Contractor Gun Filter Assembly, 50 Mesh - 1 per card
	218133	Old Contractor Gun Filter Assembly, 100 Mesh - 1 per card
	224455	Old Contractor Gun Filter Screen Element, 50 Mesh - 2 per card
	224456	Old Contractor Gun Filter Screen Element, 100 Mesh - 2 per card


Manifold & Tip Filters

THE CORRECT FILTER REDUCES TIP CLOGS

Mesh Size	200	100	60	30
Materials	Stains, Varnishes, Polyurethane, Solvent-Based Paints	Lacquers, Enamels (Solvent), Solvent-Based Paints	Latex, Enamels (Latex)	Heavy Latex, Block Filler, Elastomeric
Use with Tip Sizes	.007" - .013"	.013" - .015"	.015" - .029"	.031"+

Clean and replace filters often to ensure proper spraying pressure

MANIFOLD FILTERS




246425
246384
246382
246383

EASY OUT FILTERS, SHORT

For use with ST, STX, Ultra 395/495/595 Airless Sprayers

Short, Gray, Vertical, 30 Mesh - 1 per card
Short, Black, Vertical, 60 Mesh - 1 per card
Short, Blue, Vertical, 100 Mesh - 1 per card
Short, Red, Vertical, 200 Mesh - 1 per card



244071
244067
244068
244069

EASY OUT FILTERS, LONG

For use with Ultra Max, GMax, GH 200 and HydraMax Airless Sprayers

Long, Gray, Vertical, 30 Mesh - 1 per card
Long, Black, Vertical, 60 Mesh - 1 per card
Long, Blue, Vertical, 100 Mesh - 1 per card
Long, Red, Vertical, 200 Mesh - 1 per card



243080
243081
243226

EASY OUT FILTERS, SHORT – For use with ST PRO Airless Sprayers

Short, Black, Horizontal, 60 Mesh - 1 per card
Short, Blue, Horizontal, 100 Mesh - 1 per card
Short, Red, Horizontal, 200 Mesh - 1 per card



236495
236496
236497
236498

STANDARD FILTERS - SHORT

Filter Screen, 30 Mesh - 2 per card
Latex Filter Screen, 60 Mesh - 2 per card
Enamel Filter Screen, 100 Mesh - 2 per card
Stain Filter Screen, 200 Mesh - 2 per card



224458
224459
224468
224469

STANDARD FILTERS - LONG

Filter Screen, 30 Mesh - 2 per card
Latex Filter Screen, 60 Mesh - 2 per card
Enamel Filter Screen, 100 Mesh - 2 per card
Stain Filter Screen, 200 Mesh - 2 per card

TIP FILTERS

- Provides additional filtering when using a flat tip to help reduce tip plugging and provide a higher quality finish.



224454
224453
164120
220254

Latex Tip Filter, 60 Mesh - 5 per card
Enamel/Stain Tip Filter, 100 Mesh - 5 per card
Tip Filter Housing
Tip Filter Kit - Contains two tip filters (60 & 100 Mesh), tip filter housing and one driplless tip guard

Pump Lowers & Fluids

One of the most important sprayer components is the pump lower. Graco Fluids are proprietary formulations designed to protect Graco lowers from corrosion and freezing. They will extend pump life and assure sprayers are in top performance when you need them.

Graco manufactures the industry's most durable and simple-to-replace pump lowers. These lowers are considered wear items and need regular maintenance to operate at peak performance. Keeping a spare lower on hand for quick and easy replacement will maximize spray time.

PUMP ARMOR™ FLUID

- ▶ Protects pump for storage and freeze proof to - 30° F (-34.4° C).
- ▶ Fill pump with Pump Armor fluid and leave it in until you use it again.



243103	1 Quart (1 Liter)
245133	1 Gallon (3.8 Liters)

TSL™ THROAT SEAL LIQUID

- ▶ Prevents paint and coatings from drying onto the displacement rod and packings
- ▶ Extends pump life



206994	8 ounces (.24 Liter)
206995	1 Quart (1 Liter)
206996	1 Gallon (3.8 Liters)

HYDRAULIC FLUID

- ▶ Use with Graco HydraMax and GH Sprayers

207428	1 Gallon (3.8 Liters)
--------	-----------------------

PUMP LOWERS

- ▶ Graco Pump Lower Kits lead the industry in durability and ease of installation. Keep a spare on hand to minimize downtime in the field. (See price list or local Graco Distributor for a complete list of Graco Pump Lower Kits.)



17C718	Endurance Pump Lower Kit for 390, Ultra 395, Ultra Max II 490/495/595, GMAX 3400, FinishPro 395
17C487	Endurance Pump Lower Kit for 390 PC, 395 PC Pro, 490/495/595 PC Pro, Finish Pro II 395 PC, Finish Pro II 595 PC Pro
16Y598	Endurance Pump Lower Kit for Ultra Max 695/795, and GMaxII 3900 Standard
16X414	Endurance Pump Lower Kit for New Ultra Max 695/795, and GMaxII 3900 ProContractor with ProConnect II

WARRANTY

ACCESSORIES

1-Year Warranty

Coverage against defects in materials and workmanship on accessories and parts.



WARRANTY



ABOUT GRACO

PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters
Graco N.V.
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32 89 770 700
Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500
Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Building 7
1029 Zhongshan Road South
Huangpu District
Shanghai 200011
The People's Republic of China
Tel: 86 21 649 50088
Fax: 86 21 649 50077

INDIA

Graco Hong Kong Ltd.
India Liaison Office
Room 443, Augusta Point
Regus Business Centre 53
Golf Course Road
Gurgaon, Haryana
India 122001
Tel: 91 124 435 4208
Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300
Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
Shinhan Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-si, Korea 431-060
Tel: 82 31 476 9400
Fax: 82 31 476 9801

SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

800-690-2894 or visit us at www.graco.com.

Graco Inc. is registered to I.S. EN ISO 9001

North America
Customer Service
800-690-2894
Fax 800-334-6955